

**توليد نور**  
**TOLID NOOR**  
LIGHTING INDUSTRIES

2022

PRODUCT CATALOG



# INDEX



01 - Lena - down lights without driver (DOB)  
built-in light & direct electricity



03 - Moonlight RA - down lights  
built-in light



05 - Moonlight SA - down lights  
built-in light



06 - Sunlight SMD - down lights  
built-in light



08 - Sunlight COB - down lights  
built-in light



10 - Sunlight COB - down lights  
built-in light



11 - Moonlight - down lights  
surface light




12 - Moonlight NRM - down lights  
surface light




13 - Moonlight NSM - down lights  
surface light


# INDEX

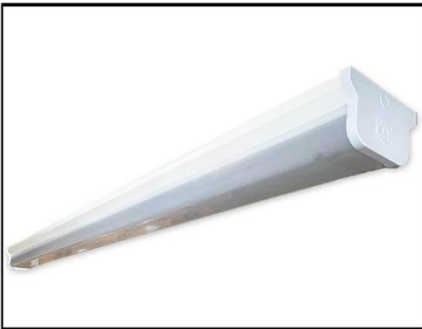

15 - Arta - Liner lights without driver (DOB)  
surface and hanging light - direct electricity

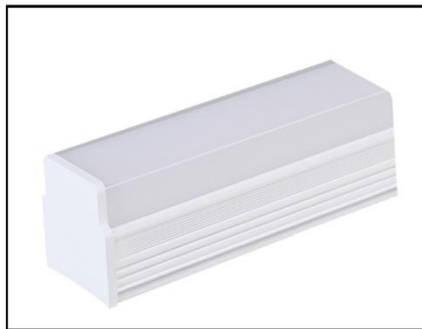


17 - Asna - Liner lights without driver (DOB)  
surface and hanging light - direct electricity

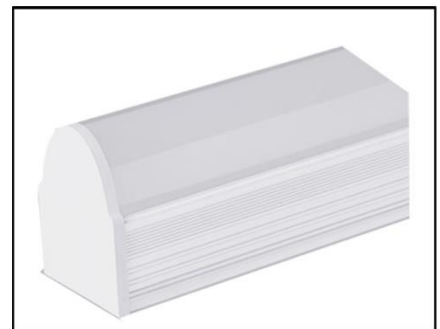

18 - Asna - Liner lights without driver (DOB)  
surface and hanging light - direct electricity



19 - Arano - Liner lights  
surface and hanging light

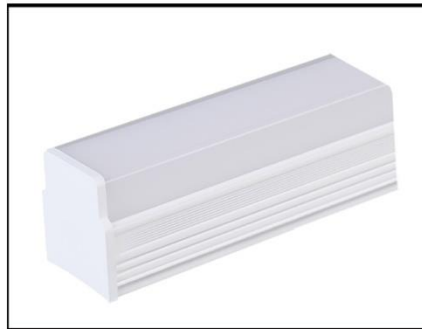

21 - Asna - Liner lights  
surface and hanging light



22 - Asna - Liner lights  
surface and hanging light




24- Levin - Liner lights  
built-in light



25 - Levin plus - Liner lights without driver (DOB)  
built-in light & direct electricity



26 - Levin plus - Liner lights  
built-in light

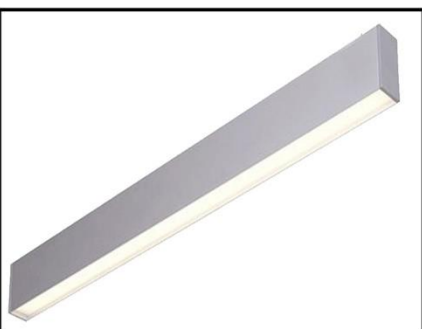

28 - Parcolight - Liner lights  
surface and hanging light



29 - Parcolight plus - Liner lights without driver (DOB)  
surface and hanging light - direct electricity



30 - Parcolight plus - Liner lights  
surface and hanging light

# INDEX



32 - Market panel - Moonlights  
built-in light



34 - Economy panel - Moonlights  
surface & built-in light



36 - Flicker free (NF) panel - Moonlights  
surface & built-in light



38 - LED Royal - Moonlights  
built-in light




40 - Fluorescent Royal - Moonlights  
surface & built-in light



43 - Aisa - Moonlights  
surface & built-in light



44 - LED Angel - Moonlights  
built-in light

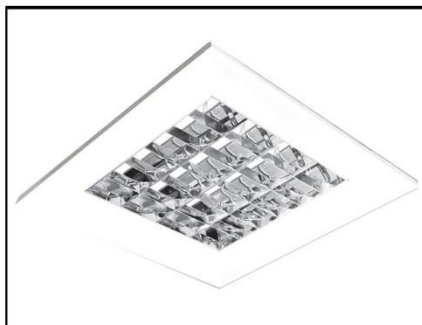

45 - Fluorescent Angel - Moonlights  
built-in light



46 - Ata - Moonlights  
built-in light



47 - LED Angelia - Moonlights  
surface & built-in light



48 - Fluorescent Angelia - Moonlights  
surface & built-in light



49 - Arista - Moonlights  
surface & built-in light



# INDEX



51 - Arsin - Rail lights



53 - Arsin 's accessories



55 - Adrina - Industrial lights (IP65)



59 - Azira - Projector lights (IP66)  
with different lenses



60 - Azira -Street projector lights (IP66)



61 - Aisan - wallwasher lights (IP66)



65 - Aina - Decorative wall lights (IP65)



66 - Venezia - Decorative wall lights (IP65)



67 - Mira - Emergency & exit lights  
surface and hanging light



68 - Arian - Green space lights  
for outdoor



68 - Arian - wall lights  
for outdoor




70- Negatoscope - Medical centers lights  
surface, built-in or wall light

7W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR2209007WW_63	LED SMD	3000k	>80	220	560	90	63	45	50 PCS
TLR2209007C4_63	LED SMD	4000k	>80	220	560	90	63	45	50 PCS
TLR2209007W6_63	LED SMD	6500k	>80	220	560	90	63	45	50 PCS

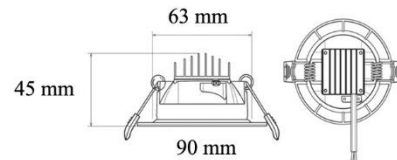


9W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR2209009WW	LED SMD	3000k	>80	220	720	105	80	45	50 PCS
TLR2209009C4	LED SMD	4000k	>80	220	720	105	80	45	50 PCS
TLR2209009W6	LED SMD	6500k	>80	220	720	105	80	45	50 PCS

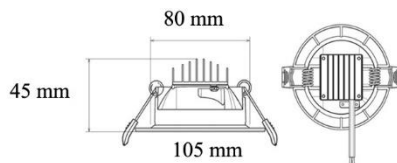


12W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR2209012WW	LED SMD	3000k	>80	220	960	145	120	50	56 PCS
TLR2209012C4	LED SMD	4000k	>80	220	960	145	120	50	56 PCS
TLR2209012W6	LED SMD	6500k	>80	220	960	145	120	50	56 PCS

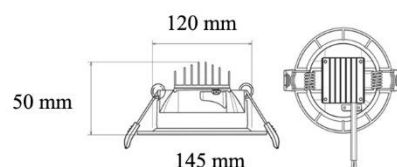


18W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR2209018WW	LED SMD	3000k	>80	220	1440	180	150	60	36 PCS
TLR2209018C4	LED SMD	4000k	>80	220	1440	180	150	60	36 PCS
TLR2209018W6	LED SMD	6500k	>80	220	1440	180	150	60	36 PCS

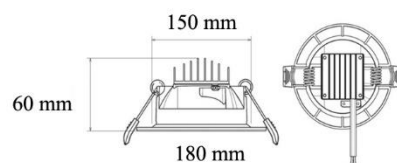


30W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR2209030WW	LED SMD	3000k	>80	220	2400	250	205	70	20 PCS
TLR2209030C4	LED SMD	4000k	>80	220	2400	250	205	70	20 PCS
TLR2209030W6	LED SMD	6500k	>80	220	2400	250	205	70	20 PCS

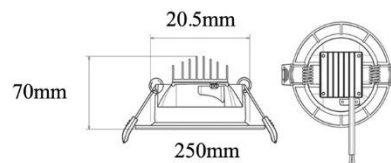




7W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR84BP007WW	LED SMD	3000k	>80	220	560	105	80	40	36 PCS
TLR84BP007C4	LED SMD	4000k	>80	220	560	105	80	40	36 PCS
TLR84BP007W6	LED SMD	6500k	>80	220	560	105	80	40	36 PCS




12W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR84BP012WW	LED SMD	3000k	>80	220	1040	138	120	40	30 PCS
TLR84BP012C4	LED SMD	4000k	>80	220	1040	138	120	40	30 PCS
TLR84BP012W6	LED SMD	6500k	>80	220	1040	138	120	40	30 PCS




18W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR84BP018WW	LED SMD	3000k	>80	220	1440	173	142	40	30 PCS
TLR84BP018C4	LED SMD	4000k	>80	220	1440	173	142	40	30 PCS
TLR84BP018W6	LED SMD	6500k	>80	220	1440	173	142	40	30 PCS




26W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR84BP026WW	LED SMD	3000k	>80	220	2080	231	204	40	12 PCS
TLR84BP026C4	LED SMD	4000k	>80	220	2080	231	204	40	12 PCS
TLR84BP026W6	LED SMD	6500k	>80	220	2080	231	204	40	12 PCS




32W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR84BP032WW	LED SMD	3000k	>80	220	2560	240	210	40	10 PCS
TLR84BP032C4	LED SMD	4000k	>80	220	2560	240	210	40	10 PCS
TLR84BP032W6	LED SMD	6500k	>80	220	2560	240	210	40	10 PCS






7W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings


Technical code	Light Source	CCT	CRI	Input Voltage	Lm	W mm	W1 mm	L mm	L1 mm	H mm	QTT
TLR83BP007WW	LED SMD	3000k	>80	220	560	105	74/5	105	74/5	40	36 PCS
TLR83BP007C4	LED SMD	4000k	>80	220	560	105	74/5	105	74/5	40	36 PCS
TLR83BP007W6	LED SMD	6500k	>80	220	560	105	74/5	105	74/5	40	36 PCS



18W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings


Technical code	Light Source	CCT	CRI	Input Voltage	Lm	W mm	W1 mm	L mm	L1 mm	H mm	QTT
TLR83BP018WW	LED SMD	3000k	>80	220	1440	173	142	173	142	40	30 PCS
TLR83BP018C4	LED SMD	4000k	>80	220	1440	173	142	173	142	40	30 PCS
TLR83BP018W6	LED SMD	6500k	>80	220	1440	173	142	173	142	40	30 PCS



26W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings


Technical code	Light Source	CCT	CRI	Input Voltage	Lm	W mm	W1 mm	L mm	L1 mm	H mm	QTT
TLR83BP026WW	LED SMD	3000k	>80	220	2080	231	204			40	12 PCS
TLR83BP026C4	LED SMD	4000k	>80	220	2080	231	204	231	204	40	12 PCS
TLR83BP026W6	LED SMD	6500k	>80	220	2080	231	204	231	204	40	12 PCS



32W

PBT + ABS combined polymer  
built-in all Knauf, plaster and tile ceilings

Technical code	Light Source	CCT	CRI	Input Voltage	Lm	W mm	W1 mm	L mm	L1 mm	H mm	QTT
TLR83BP032WW	LED SMD	3000k	>80	220	2560	240	210	240	210	40	10 PCS
TLR83BP032C4	LED SMD	4000k	>80	220	2560	240	210	240	210	40	10 PCS
TLR83BP032W6	LED SMD	6500k	>80	220	2560	240	210	240	210	40	10 PCS







7W

Diecast Aluminum  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR71SD007WW	LED SMD	3000k	>80	220	660	90	68	40	55 PCS
TLR71SD007C4	LED SMD	4000k	>80	220	660	90	68	40	55 PCS
TLR71SD007W6	LED SMD	6500k	>80	220	660	90	68	40	55 PCS





12W

Diecast Aluminum  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR71SD012WW	LED SMD	3000k	>80	220	1130	112	80	53	36 PCS
TLR71SD012C4	LED SMD	4000k	>80	220	1130	112	80	53	36 PCS
TLR71SD012W6	LED SMD	6500k	>80	220	1130	112	80	53	36 PCS





18W

Diecast Aluminum  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR71SD018WW	LED SMD	3000k	>80	220	1700	160	120	74	24 PCS
TLR71SD018C4	LED SMD	4000k	>80	220	1700	160	120	74	24 PCS
TLR71SD018W6	LED SMD	6500k	>80	220	1700	160	120	74	24 PCS





30W

Diecast Aluminum  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR71SD030WW	LED SMD	3000k	>80	220	2800	200	156	74	16 PCS
TLR71SD030C4	LED SMD	4000k	>80	220	2800	200	156	74	16 PCS
TLR71SD030W6	LED SMD	6500k	>80	220	2800	200	156	74	16 PCS





60W

Diecast Aluminum  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR71SD060WW	LED SMD	3000k	>80	220	5800	230	200	100	16 PCS
TLR71SD060C4	LED SMD	4000k	>80	220	5800	230	200	100	16 PCS
TLR71SD060W6	LED SMD	6500k	>80	220	5800	230	200	100	16 PCS






3W

Diecast Aluminum  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR71CR003WW	LED COB	3000k	>80	220	250	50	36	28	100 PCS
TLR71CR003C4	LED COB	4000k	>80	220	250	50	36	28	100 PCS
TLR71CR003W6	LED COB	6500k	>80	220	250	50	36	28	100 PCS

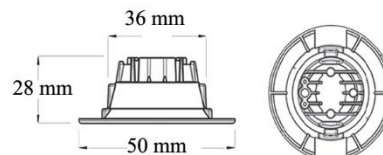


7W

Diecast Aluminum  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR71CO007WW	LED COB	3000k	>80	220	679	90	68	40	55 PCS
TLR71CO007C4	LED COB	4000k	>80	220	679	90	68	40	55 PCS
TLR71CO007W6	LED COB	6500k	>80	220	679	90	68	40	55 PCS

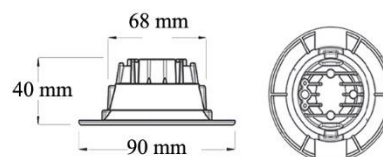


10W

Diecast Aluminum  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR71CO010WW	LED COB	3000k	>80	220	840	112	80	53	36 PCS
TLR71CO010C4	LED COB	4000k	>80	220	840	112	80	53	36 PCS
TLR71CO010W6	LED COB	6500k	>80	220	840	112	80	53	36 PCS

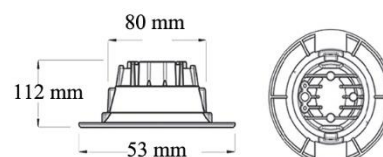


18W

Diecast Aluminum  
built-in all Knauf, plaster and tile ceilings




Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR71CO018WW	LED COB	3000k	>80	220	2052	160	120	74	24 PCS
TLR71CO018C4	LED COB	4000k	>80	220	2052	160	120	74	24 PCS
TLR71CO018W6	LED COB	6500k	>80	220	2052	160	120	74	24 PCS

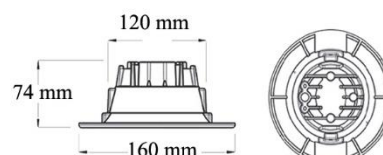

Brilliant and attractive!

A reliable option for store lighting, high ceilings,  
large commercial centers and even different residential  
houses!






3W

Diecast Aluminum  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	W mm	W1 mm	L mm	L1 mm	H mm	QTT
TLR71CS003WW	LED COB	3000k	>80	220	250	36	36	42	42	28	100 PCS
TLR71CS003C4	LED COB	4000k	>80	220	250	36	36	42	42	28	100 PCS
TLR71CS003W6	LED COB	6500k	>80	220	250	36	36	42	42	28	100 PCS

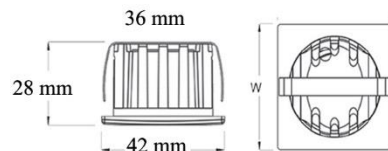


30W

Diecast Aluminum  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR71CO030WW	LED COB	3000k	>80	220	3300	200	156	74	16 PCS
TLR71CO030C4	LED COB	4000k	>80	220	3300	200	156	74	16 PCS
TLR71CO030W6	LED COB	6500k	>80	220	3300	200	156	74	16 PCS

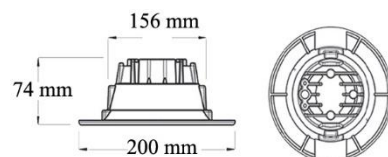


40W

Diecast Aluminum  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR71CO040WW	LED COB	3000k	>80	220	4240	200	156	74	16 PCS
TLR71CO040C4	LED COB	4000k	>80	220	4240	200	156	74	16 PCS
TLR71CO040W6	LED COB	6500k	>80	220	4240	200	156	74	16 PCS

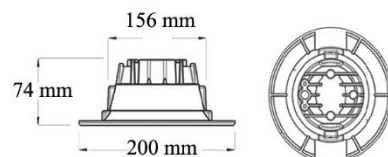


50W

Diecast Aluminum  
built-in all Knauf, plaster and tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	D1 mm	H mm	QTT
TLR71CO050WW	LED COB	3000k	>80	220	5400	230	200	100	12 PCS
TLR71CO050C4	LED COB	4000k	>80	220	5400	230	200	100	12 PCS
TLR71CO050W6	LED COB	6500k	>80	220	5400	230	200	100	12 PCS

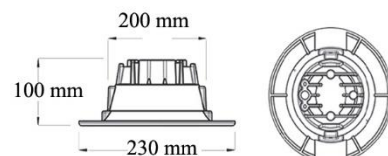


48W

Steel  
Surface light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	E mm	H mm	QTT
TLS80BR048WW	LED SMD	3000k	>80	220	4500	497	220	46	2 PCS
TLS80BR048C4	LED SMD	4000k	>80	220	4500	497	220	46	2 PCS
TLS80BR048W6	LED SMD	6500k	>80	220	4500	497	220	46	2 PCS

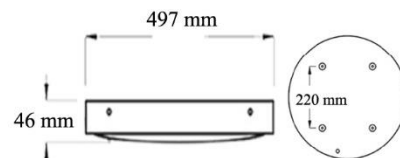




7W

PBT + ABS combined polymer  
Surface light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	E mm	H mm	QTT
TLS82BP007WW	LED SMD	3000k	>80	220	560	121	67	40	36 PCS
TLS82BP007C4	LED SMD	4000k	>80	220	560	121	67	40	36 PCS
TLS82BP007W6	LED SMD	6500k	>80	220	560	121	67	40	36 PCS

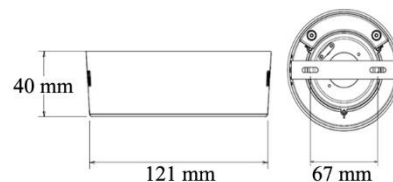


18W

PBT + ABS combined polymer  
Surface light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	E mm	H mm	QTT
TLS82BP018WW	LED SMD	3000k	>80	220	1500	187	130	40	30 PCS
TLS82BP018C4	LED SMD	4000k	>80	220	1500	187	130	40	30 PCS
TLS82BP018W6	LED SMD	6500k	>80	220	1500	187	130	40	30 PCS

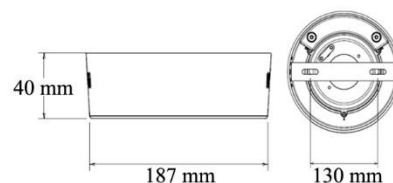


26W

PBT + ABS combined polymer  
Surface light




Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	E mm	H mm	QTT
TLS82BP026WW	LED SMD	3000k	>80	220	2340	246	190	40	12 PCS
TLS82BP026C4	LED SMD	4000k	>80	220	2340	246	190	40	12 PCS
TLS82BP026W6	LED SMD	6500k	>80	220	2340	246	190	40	12 PCS

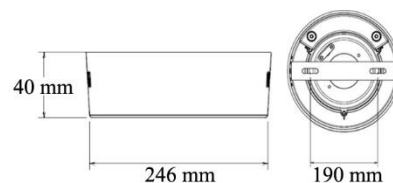

The best option for a space that is important to you!

Moonlight's family products is the best option for spaces that require good light, high productivity and permanent quality.



7W


PBT + ABS combined polymer  
Surface light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	E mm	H mm	QTT
TLS81BP007WW	LED SMD	3000k	>80	220	560	121	87	40	36 PCS
TLS81BP007C4	LED SMD	4000k	>80	220	560	121	87	40	36 PCS
TLS81BP007W6	LED SMD	6500k	>80	220	560	121	87	40	36 PCS



40 mm



18W


PBT + ABS combined polymer  
Surface light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	E mm	H mm	QTT
TLS81BP018WW	LED SMD	3000k	>80	220	1500	187	130	40	30 PCS
TLS81BP018C4	LED SMD	4000k	>80	220	1500	187	130	40	30 PCS
TLS81BP018W6	LED SMD	6500k	>80	220	1500	187	130	40	30 PCS



40 mm



26W


PBT + ABS combined polymer  
Surface light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	D mm	E mm	H mm	QTT
TLS82BP026WW	LED SMD	3000k	>80	220	2340	246	190	40	12 PCS
TLS82BP026C4	LED SMD	4000k	>80	220	2340	246	190	40	12 PCS
TLS82BP026W6	LED SMD	6500k	>80	220	2340	246	190	40	12 PCS




40 mm





The bright line of life, with the family of Asena and Arta line lights

Asena, Arta linear lights, using aluminum and steel bodies and polycarbonate diffusers, are the best and most logical option for lighting routine work, life, and business spaces.




40W

Steel  
Surface and hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TOS21D3040WW	LED SMD	3000k	>80	220	4200	595	80	ADJ	55	20 PCS
TOS21D3040C4	LED SMD	4000k	>80	220	4200	595	80	ADJ	55	20 PCS
TOS21D3040W6	LED SMD	6500k	>80	220	4200	595	80	ADJ	55	20 PCS




80W

Steel  
Surface and hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TOS21D3080WW	LED SMD	3000k	>80	220	8400	1182	80	ADJ	55	12 PCS
TOS21D3080C4	LED SMD	4000k	>80	220	8400	1182	80	ADJ	55	12 PCS
TOS21D3080W6	LED SMD	6500k	>80	220	8400	1182	80	ADJ	55	12 PCS




40W

Extruded Aluminum  
Surface and hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS73FL040WW	LED SMD	3000k	>80	220	4200	595	54	400	45	24 PCS
TLS73FL040C4	LED SMD	4000k	>80	220	4200	595	54	400	45	24 PCS
TLS73FL040W6	LED SMD	6500k	>80	220	4200	595	54	400	45	24 PCS




80W

Extruded Aluminum  
Surface and hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS73FL080WW	LED SMD	3000k	>80	220	8400	1182	54	740	45	12 PCS
TLS73FL080C4	LED SMD	4000k	>80	220	8400	1182	54	740	45	12 PCS
TLS73FL080W6	LED SMD	6500k	>80	220	8400	1182	54	740	45	12 PCS






40W

Extruded Aluminum  
Surface and hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS73KL040WW	LED SMD	3000k	>80	220	4200	595	54	400	45	24 PCS
TLS73KL040C4	LED SMD	4000k	>80	220	4200	595	54	400	45	24 PCS
TLS73KL040W6	LED SMD	6500k	>80	220	4200	595	54	400	45	24 PCS




80W

Extruded Aluminum  
Surface and hanging light




Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS73KL080WW	LED SMD	3000k	>80	220	8400	1182	54	740	45	12 PCS
TLS73KL080C4	LED SMD	4000k	>80	220	8400	1182	54	740	45	12 PCS
TLS73KL080W6	LED SMD	6500k	>80	220	8400	1182	54	740	45	12 PCS



Show your face in the mirror!

A practical and safe light in bathrooms and above mirrors




8W

Extruded Aluminum  
Surface and hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS6006008WW	LED SMD	3000k	>80	220	932	253	60	22	50	20 PCS
TLS6006008C4	LED SMD	4000k	>80	220	932	253	60	22	50	20 PCS
TLS6006008W6	LED SMD	6500k	>80	220	932	253	60	22	50	20 PCS




13W

Extruded Aluminum  
Surface and hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS6006013WW	LED SMD	3000k	>80	220	1155	348	60	52	50	20 PCS
TLS6006013C4	LED SMD	4000k	>80	220	1155	348	60	52	50	20 PCS
TLS6006013W6	LED SMD	6500k	>80	220	1155	348	60	52	50	20 PCS




20W

Extruded Aluminum  
Surface and hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS6006020WW	LED SMD	3000k	>80	220	2100	555	60	110	50	20 PCS
TLS6006020C4	LED SMD	4000k	>80	220	2100	555	60	110	50	20 PCS
TLS6006020W6	LED SMD	6500k	>80	220	2100	555	60	110	50	20 PCS




20W

Extruded Aluminum  
Surface and hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS65FL020WW	LED SMD	3000k	>80	220	2200	580	54	400	45	24 PCS
TLS65FL020C4	LED SMD	4000k	>80	220	2200	580	54	400	45	24 PCS
TLS65FL020W6	LED SMD	6500k	>80	220	2200	580	54	400	45	24 PCS




40W

Extruded Aluminum  
Surface and hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS65FL040WW	LED SMD	3000k	>80	220	4200	1182	54	740	45	12 PCS
TLS65FL040C4	LED SMD	4000k	>80	220	4200	1182	54	740	45	12 PCS
TLS65FL040W6	LED SMD	6500k	>80	220	4200	1182	54	740	45	12 PCS




20W

Extruded Aluminum  
Surface and hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS65KL020WW	LED SMD	3000k	>80	220	2200	580	54	400	45	24 PCS
TLS65KL020C4	LED SMD	4000k	>80	220	2200	580	54	400	45	24 PCS
TLS65KL020W6	LED SMD	6500k	>80	220	2200	580	54	400	45	24 PCS




40W

Extruded Aluminum  
Surface and hanging light




Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS65KL040WW	LED SMD	3000k	>80	220	4200	1182	54	740	45	12 PCS
TLS65KL040C4	LED SMD	4000k	>80	220	4200	1182	54	740	45	12 PCS
TLS65KL040W6	LED SMD	6500k	>80	220	4200	1182	54	740	45	12 PCS





### Endless light!

Highlighting a design or unconsciously guiding a visitor is the task of linear lights in environmental architecture. A quality, standard and lasting light or a symbol of beauty!






40W

Steel  
built-in light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLR63A3040WW	LED SMD	3000k	>80	220	4080	1152	1132	46	35	42	576 mm
TLR63A3040C4	LED SMD	4000k	>80	220	4080	1152	1132	46	35	42	576 mm
TLR63A3040W6	LED SMD	6500k	>80	220	4080	1152	1132	46	35	42	576 mm




40W

Steel  
built-in light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLR63B3040WW	LED SMD	3000k	>80	220	4080	1132	1112	71	60	42	566 mm
TLR63B3040C4	LED SMD	4000k	>80	220	4080	1132	1112	71	60	42	566 mm
TLR63B3040W6	LED SMD	6500k	>80	220	4080	1132	1112	71	60	42	566 mm




50W

Steel  
built-in light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLR63C3050WW	LED SMD	3000k	>80	220	5100	1152	1132	115	90	75	576 mm
TLR63C3050C4	LED SMD	4000k	>80	220	5100	1152	1132	115	90	75	576 mm
TLR63C3050W6	LED SMD	6500k	>80	220	5100	1152	1132	115	90	75	576 mm






80W

Extruded Aluminum  
built-in light


Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TOR63A4080WW+	LED SMD	3000k	>80	220	4360	1150	1130	60	43	40	575 mm
TOR63A4080C4+	LED SMD	4000k	>80	220	4360	1150	1130	60	43	40	575 mm
TOR63A4080W6+	LED SMD	6500k	>80	220	4360	1150	1130	60	43	40	575 mm



80W

Extruded Aluminum  
built-in light

Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TOR63B4080WW+	LED SMD	3000k	>80	220	4360	1166	1146	92	70	76	583 mm
TOR63B4080C4+	LED SMD	4000k	>80	220	4360	1166	1146	92	70	76	583 mm
TOR63B4080W6+	LED SMD	6500k	>80	220	4360	1166	1146	92	70	76	583 mm






40W

Extruded Aluminum  
built-in light


Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLR63A4040WW+	LED SMD	3000k	>80	220	4360	1150	1130	60	43	48	575 mm
TLR63A4040C4+	LED SMD	4000k	>80	220	4360	1150	1130	60	43	48	575 mm
TLR63A4040W6+	LED SMD	6500k	>80	220	4360	1150	1130	60	43	48	575 mm



40W

Extruded Aluminum  
built-in light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLR63B4040WW+	LED SMD	3000k	>80	220	4360	1146	1126	92	70	76	573 mm
TLR63B4040C4+	LED SMD	4000k	>80	220	4360	1146	1126	92	70	76	573 mm
TLR63B4040W6+	LED SMD	6500k	>80	220	4360	1146	1126	92	70	76	573 mm



50W

Extruded Aluminum  
built-in light

Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLR63C4050WW+	LED SMD	3000k	>80	220	5300	1166	1146	116	94	85	583 mm
TLR63C4050C4+	LED SMD	4000k	>80	220	5300	1166	1146	116	94	85	583 mm
TLR63C4050W6+	LED SMD	6500k	>80	220	5300	1166	1146	116	94	85	583 mm






A symbol of modern lighting!

Aligned with simplicity, aligned with engineering.

Parcolight Plus lights, in their simplicity, have amazing power in providing the lighting of your desired environment.



40W


Steel  
Surface & hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS64A3040WW	LED SMD	3000k	>80	220	4080	1132	30	856	60	566 mm
TLS64A3040C4	LED SMD	4000k	>80	220	4080	1132	30	856	60	566 mm
TLS64A3040W6	LED SMD	6500k	>80	220	4080	1132	30	856	60	566 mm



30 mm  
60 mm



40W


Steel  
Surface & hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS64B3040WW	LED SMD	3000k	>80	220	4080	1112	60	856	60	566 mm
TLS64B3040C4	LED SMD	4000k	>80	220	4080	1112	60	856	60	566 mm
TLS64B3040W6	LED SMD	6500k	>80	220	4080	1112	60	856	60	566 mm



60 mm  
60 mm



50W


Steel  
Surface & hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS64C3050WW	LED SMD	3000k	>80	220	5100	1132	90	856	60	566 mm
TLS64C3050C4	LED SMD	4000k	>80	220	5100	1132	90	856	60	566 mm
TLS64C3050W6	LED SMD	6500k	>80	220	5100	1132	90	856	60	566 mm



90 mm  
60 mm




80W

Extruded Aluminum  
Surface & hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TOS64A4080WW+	LED SMD	3000k	>80	220	4360	1150	43	856	65	575 mm
TOS64A4080C4+	LED SMD	4000k	>80	220	4360	1150	43	856	65	575 mm
TOS64A4080W6+	LED SMD	6500k	>80	220	4360	1150	43	856	65	575 mm




80W

Extruded Aluminum  
Surface & hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TOS64B4080WW+	LED SMD	3000k	>80	220	4360	1134	70	856	87	567mm
TOS64B4080C4+	LED SMD	4000k	>80	220	4360	1134	70	856	87	567mm
TOS64B4080W6+	LED SMD	6500k	>80	220	4360	1134	70	856	87	567mm






40W

Extruded Aluminum  
Surface & hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS64A4040WW+	LED SMD	3000k	>80	220	4360	1150	43	856	65	575 mm
TLS64A4040C4+	LED SMD	4000k	>80	220	4360	1150	43	856	65	575 mm
TLS64A4040W6+	LED SMD	6500k	>80	220	4360	1150	43	856	65	575 mm




40W

Extruded Aluminum  
Surface & hanging light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS64B4040WW+	LED SMD	3000k	>80	220	4360	1114	70	856	87	575 mm
TLS64B4040C4+	LED SMD	4000k	>80	220	4360	1114	70	856	87	575 mm
TLS64B4040W6+	LED SMD	6500k	>80	220	4360	1114	70	856	87	575 mm




50W

Extruded Aluminum  
Surface & hanging light




Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS64C4050WW+	LED SMD	3000k	>80	220	5300	1144	94	856	105	575 mm
TLS64C4050C4+	LED SMD	4000k	>80	220	5300	1144	94	856	105	575 mm
TLS64C4050W6+	LED SMD	6500k	>80	220	5300	1144	94	856	105	575 mm



### Perfect lighting!

The Moonlight panel products group in various sizes

There are pleasant and comfortable option for all types of tile, plaster and knaf ceilings and also has the ability to be installed face-on.




24W

Steel  
built-in just for tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	W mm	L mm	H mm	QTT
TLR94AS024WW	LED SMD	3000k	>80	220	2640	310	310	48	2 PCS
TLR94AS024C4	LED SMD	4000k	>80	220	2640	310	310	48	2 PCS
TLR94AS024W6	LED SMD	6500k	>80	220	2640	310	310	48	2 PCS

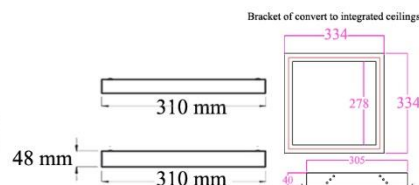


26W

Steel  
built-in just for tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	W mm	L mm	H mm	QTT
TLR94HS026WW	LED SMD	3000k	>80	220	2860	595	295	48	2 PCS
TLR94HS026C4	LED SMD	4000k	>80	220	2860	595	295	48	2 PCS
TLR94HS026W6	LED SMD	6500k	>80	220	2860	595	295	48	2 PCS

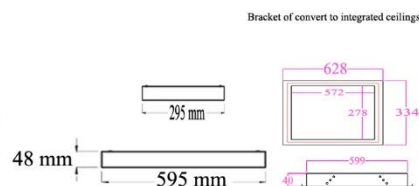


40W

Steel  
built-in just for tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	W mm	L mm	H mm	QTT
TLR94IS040WW	LED SMD	3000k	>80	220	4400	445	445	48	2 PCS
TLR94IS040C4	LED SMD	4000k	>80	220	4400	445	445	48	2 PCS
TLR94IS040W6	LED SMD	6500k	>80	220	4400	445	445	48	2 PCS

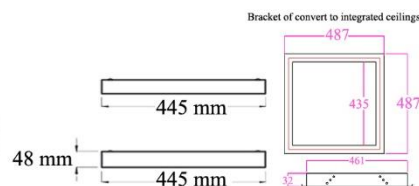


48W

Steel  
built-in just for tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	W mm	L mm	H mm	QTT
TLR94BS048WW	LED SMD	3000k	>80	220	5280	595	595	48	2 PCS
TLR94BS048C4	LED SMD	4000k	>80	220	5280	595	595	48	2 PCS
TLR94BS048W6	LED SMD	6500k	>80	220	5280	595	595	48	2 PCS

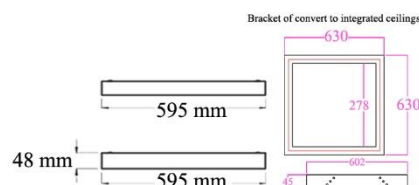




50W

Steel  
built-in just for tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	W mm	L mm	H mm	QTT
TLR94GS050WW	LED SMD	3000k	>80	220	5500	1195	295	48	2 PCS
TLR94GS050C4	LED SMD	4000k	>80	220	5500	1195	295	48	2 PCS
TLR94GS050W6	LED SMD	6500k	>80	220	5500	1195	295	48	2 PCS

Bracket of convert to integrated ceilings




110W

Steel  
built-in just for tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	W mm	L mm	H mm	QTT
TLR94VS110WW	LED SMD	3000k	>80	220	12100	1195	595	48	2 PCS
TLR94VS110C4	LED SMD	4000k	>80	220	12100	1195	595	48	2 PCS
TLR94VS110W6	LED SMD	6500k	>80	220	12100	1195	595	48	2 PCS

Bracket of convert to integrated ceilings




24W

Steel

Surface & built-in light for just tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ92AS024WW	LED SMD	3000k	>80	220	2640	310	310	247	247	53	2 PCS
TLQ92AS024C4	LED SMD	4000k	>80	220	2640	310	310	247	247	53	2 PCS
TLQ92AS024W6	LED SMD	6500k	>80	220	2640	310	310	247	247	53	2 PCS

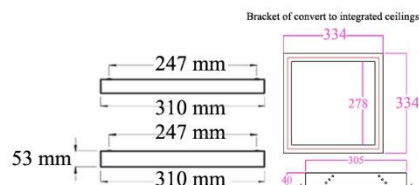


26W

Steel

Surface & built-in light for just tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ92HS026WW	LED SMD	3000k	>80	220	2880	593	295	498	272	51	2 PCS
TLQ92HS026C4	LED SMD	4000k	>80	220	2880	593	295	498	272	51	2 PCS
TLQ92HS026W6	LED SMD	6500k	>80	220	2880	593	295	498	272	51	2 PCS

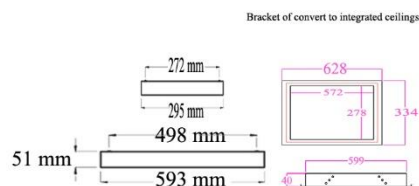


48W

Steel

Surface & built-in light for just tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ91BS048WW	LED SMD	3000k	>80	220	5760	595	595	450	450	53	2 PCS
TLQ91BS048C4	LED SMD	4000k	>80	220	5760	595	595	450	450	53	2 PCS
TLQ91BS048W6	LED SMD	6500k	>80	220	5760	595	595	450	450	53	2 PCS

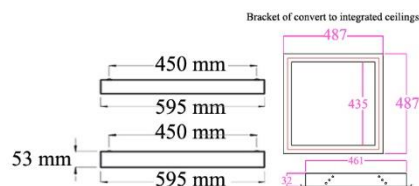


80W

Steel

Surface & built-in light for just tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ91BS080WW	LED SMD	3000k	>80	220	9600	595	595	450	450	53	2 PCS
TLQ91BS080C4	LED SMD	4000k	>80	220	9600	595	595	450	450	53	2 PCS
TLQ91BS080W6	LED SMD	6500k	>80	220	9600	595	595	450	450	53	2 PCS

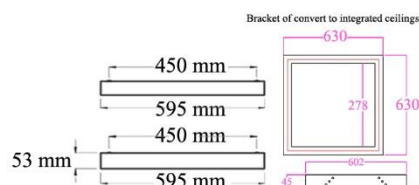


40W

Steel

Surface & built-in light for just tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ92IS040WW	LED SMD	3000k	>80	220	4400	445	445	320	320	53	2 PCS
TLQ92IS040C4	LED SMD	4000k	>80	220	4400	445	445	320	320	53	2 PCS
TLQ92IS040W6	LED SMD	6500k	>80	220	4400	445	445	320	320	53	2 PCS

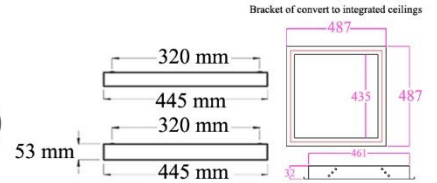


48W

Steel

Surface & built-in light for just tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ92GS048WW	LED SMD	3000k	>80	220	6200	1195	295	1156	266	51	2 PCS
TLQ92GS048C4	LED SMD	4000k	>80	220	6200	1195	295	1156	266	51	2 PCS
TLQ92GS048W6	LED SMD	6500k	>80	220	6200	1195	295	1156	266	51	2 PCS

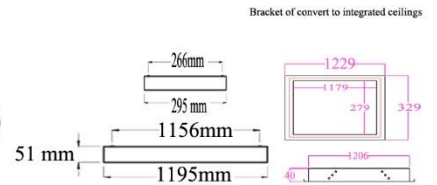


110W

Steel

Surface & built-in light for just tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ92VS110WW	LED SMD	3000k	>80	220	13860	1195	595	1134	548	51	2 PCS
TLQ92VS110C4	LED SMD	4000k	>80	220	13860	1195	595	1134	548	51	2 PCS
TLQ92VS110W6	LED SMD	6500k	>80	220	13860	1195	595	1134	548	51	2 PCS

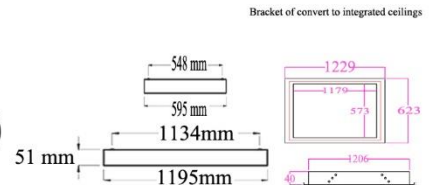


24W

Steel

Surface & built-in light for just tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLR70AN024WW	LED SMD	3000k	>80	220	2640	310	310	247	247	48	2 PCS
TLR70AN024C4	LED SMD	4000k	>80	220	2640	310	310	247	247	48	2 PCS
TLR70AN024W6	LED SMD	6500k	>80	220	2640	310	310	247	247	48	2 PCS

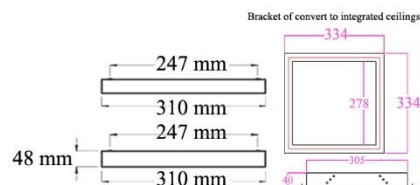


26W

Steel

Surface & built-in light for just tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ70HN026WW	LED SMD	3000k	>80	220	2880	595	295	498	272	51	2 PCS
TLQ70HN026C4	LED SMD	4000k	>80	220	2880	595	295	498	272	51	2 PCS
TLQ70HN026W6	LED SMD	6500k	>80	220	2880	595	295	498	272	51	2 PCS

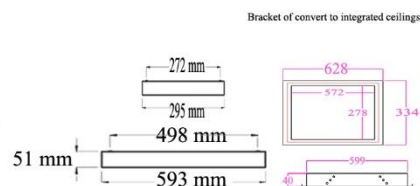


48W

Steel

Surface & built-in light for just tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ70IN048WW	LED SMD	3000k	>80	220	5280	445	445	320	320	48	2 PCS
TLQ70IN048C4	LED SMD	4000k	>80	220	5280	445	445	320	320	48	2 PCS
TLQ70IN048W6	LED SMD	6500k	>80	220	5280	445	445	320	320	48	2 PCS

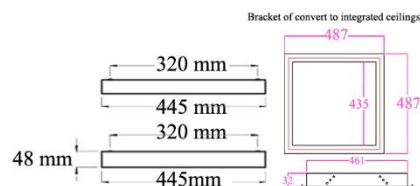


50W

Steel

Surface & built-in light for just tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ80BN050WW	LED SMD	3000k	>80	220	5760	595	595	450	450	48	2 PCS
TLQ80BN050C4	LED SMD	4000k	>80	220	5760	595	595	450	450	48	2 PCS
TLQ80BN050W6	LED SMD	6500k	>80	220	5760	595	595	450	450	48	2 PCS

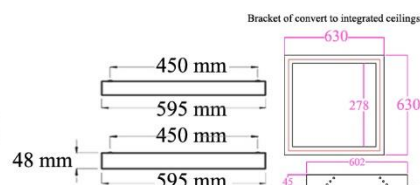



50W


Steel

Surface & built-in light for just tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ70GN050WW	LED SMD	3000k	>80	220	6200	1195	295	1156	272	51	2 PCS
TLQ70GN050C4	LED SMD	4000k	>80	220	6200	1195	295	1156	272	51	2 PCS
TLQ70GN050W6	LED SMD	6500k	>80	220	6200	1195	295	1156	272	51	2 PCS

Bracket of convert to integrated ceilings



100W


Steel

Surface & built-in light for just tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ70VN100WW	LED SMD	3000k	>80	220	12600	1195	595	1156	498	51	2 PCS
TLQ70VN100C4	LED SMD	4000k	>80	220	12600	1195	595	1156	498	51	2 PCS
TLQ70VN100W6	LED SMD	6500k	>80	220	12600	1195	595	1156	498	51	2 PCS

Bracket of convert to integrated ceilings





12W

Steel  
built-in for integrated ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLR10AN012WW	LED SMD	3000k	>80	220	970	295	295	275	275	50	2 PCS
TLR10AN012C4	LED SMD	4000k	>80	220	970	295	295	275	275	50	2 PCS
TLR10AN012W6	LED SMD	6500k	>80	220	970	295	295	275	275	50	2 PCS





24W

Steel  
built-in for integrated ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLR10AN024WW	LED SMD	3000k	>80	220	2400	295	295	275	275	50	2 PCS
TLR10AN024C4	LED SMD	4000k	>80	220	2400	295	295	275	275	50	2 PCS
TLR10AN024W6	LED SMD	6500k	>80	220	2400	295	295	275	275	50	2 PCS





30W

Steel  
built-in for integrated ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLR10HN030WW	LED SMD	3000k	>80	220	2700	595	295	575	275	50	2 PCS
TLR10HN030C4	LED SMD	4000k	>80	220	2700	595	295	575	275	50	2 PCS
TLR10HN030W6	LED SMD	6500k	>80	220	2700	595	295	575	275	50	2 PCS





40W

Steel  
built-in for integrated ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLR10IN040WW	LED SMD	3000k	>80	220	4000	445	445	425	425	50	2 PCS
TLR10IN040C4	LED SMD	4000k	>80	220	4000	445	445	425	425	50	2 PCS
TLR10IN040W6	LED SMD	6500k	>80	220	4000	445	445	425	425	50	2 PCS




50W

Steel  
built-in for integrated ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLR17BN050WW	LED SMD	3000k	>80	220	5300	595	595	575	575	50	2 PCS
TLR17BN050C4	LED SMD	4000k	>80	220	5300	595	595	575	575	50	2 PCS
TLR17BN050W6	LED SMD	6500k	>80	220	5300	595	595	575	575	50	2 PCS

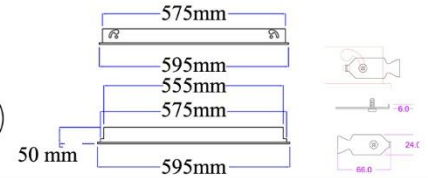


55W

Steel  
built-in for integrated ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLR10GN055WW	LED SMD	3000k	>80	220	5500	1195	295	1175	275	50	2 PCS
TLR10GN055C4	LED SMD	4000k	>80	220	5500	1195	295	1175	275	50	2 PCS
TLR10GN055W6	LED SMD	6500k	>80	220	5500	1195	295	1175	275	50	2 PCS

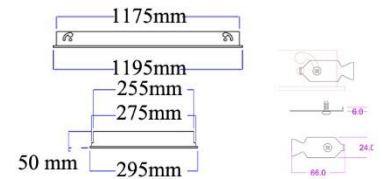


110W

Steel  
built-in for integrated ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLR10VN110WW	LED SMD	3000k	>80	220	10000	1195	595	1175	575	50	2 PCS
TLR10VN110C4	LED SMD	4000k	>80	220	10000	1195	595	1175	575	50	2 PCS
TLR10VN110W6	LED SMD	6500k	>80	220	10000	1195	595	1175	575	50	2 PCS


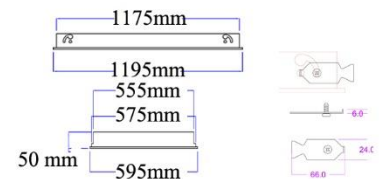


2\*36

Steel  
built-in for integrated ceilings



Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFR1002236	TC-L/T5	220	595	575	595	575	50	2 PCS





3\*36

Steel  
built-in for integrated ceilings



Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFR1002336	TC-L/T5	220	595	575	595	575	50	2 PCS





4\*36

Steel  
built-in for integrated ceilings



Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFR1002436	TC-L/T5	220	595	575	595	575	50	2 PCS






2\*36

Steel  
Surface lights



Technical code	LAMP	Input Voltage	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TFR1001236	TC-L/T5	220	595	595	503	419	57	2 PCS

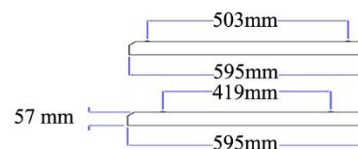


3\*36

Steel  
Surface lights



Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFR1001336	TC-L/T5	220	595	595	503	419	57	2 PCS

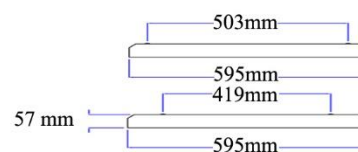


4\*36

Steel  
Surface lights



Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFR1001436	TC-L/T5	220	595	595	503	419	57	2 PCS


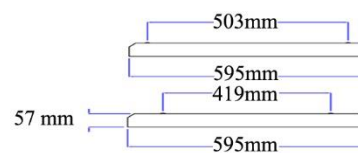


2\*18

Steel  
built-in for integrated ceilings



Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFR1002218	TC-L/T5	220	295	275	295	275	50	2 PCS




2\*18

Steel  
Surface lights



Technical code	LAMP	Input Voltage	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TFS1001218	TC-L/T5	220	297	297	225	225	57	2 PCS

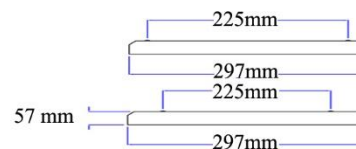


2\*36

Steel

Surface & built-in light for just tile ceilings



Technical code	LAMP	Input Voltage	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TFQ4001236	TC-L	220	595	595	473	473	61	2 PCS




3\*36

Steel

Surface & built-in light for just tile ceilings



Technical code	LAMP	Input Voltage	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TFQ4001336	TC-L	220	595	595	473	473	61	2 PCS




4\*36

Steel

Surface & built-in light for just tile ceilings



Technical code	LAMP	Input Voltage	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TFQ4001436	TC-L	220	595	595	473	473	61	2 PCS




40W

Steel  
built-in just for tile ceilings




Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLR35BR040WW	LED SMD	3000k	>80	220	3800	595	398	595	398	86	2 PCS
TLR35BR040C4	LED SMD	4000k	>80	220	3800	595	398	595	398	86	2 PCS
TLR35BR040W6	LED SMD	6500k	>80	220	3800	595	398	595	398	86	2 PCS





40W

Steel  
built-in just for tile ceilings

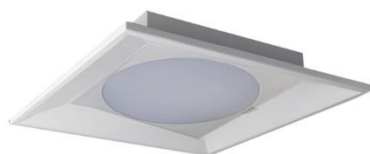


Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLR35BS040WW	LED SMD	3000k	>80	220	3800	595	398	595	398	86	2 PCS
TLR35BS040C4	LED SMD	4000k	>80	220	3800	595	398	595	398	86	2 PCS
TLR35BS040W6	LED SMD	6500k	>80	220	3800	595	398	595	398	86	2 PCS





3\*36

Steel  
built-in just for tile ceilings

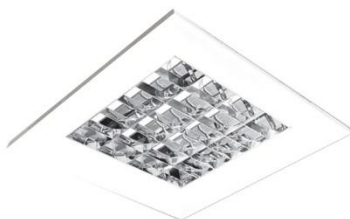


Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFR3501336	TC-L	220	595	398	595	398	86	2 PCS





4\*36

Steel  
built-in just for tile ceilings

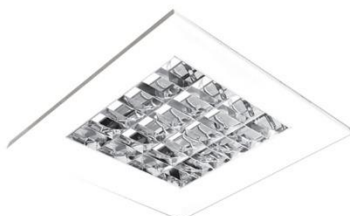

Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFR3501436	TC-L	220	595	398	595	398	86	2 PCS




2\*36

Steel  
built-in just for tile ceilings



Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFR2001236	TC-L	220	595	398	595	398	65	2 PCS




3\*36

Steel  
built-in just for tile ceilings



Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFR2001336	TC-L	220	595	398	595	398	65	2 PCS




4\*36

Steel  
built-in just for tile ceilings



Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFR2001436	TC-L	220	595	398	595	398	65	2 PCS





40W

Steel  
Surface & built-in just for tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ30BL040WW	LED SMD	3000k	>80	220	3950	595	595	377	268	50	2 PCS
TLQ30BL040C4	LED SMD	4000k	>80	220	3950	595	595	377	268	50	2 PCS
TLQ30BL040W6	LED SMD	6500k	>80	220	3950	595	595	377	268	50	2 PCS





40W

Steel  
Surface & built-in just for tile ceilings



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E1 mm	E2 mm	H mm	QTT
TLQ30BS040WW	LED SMD	3000k	>80	220	3950	595	595	377	268	50	2 PCS
TLQ30BS040C4	LED SMD	4000k	>80	220	3950	595	595	377	268	50	2 PCS
TLQ30BS040W6	LED SMD	6500k	>80	220	3950	595	595	377	268	50	2 PCS





2\*36

Steel  
Surface & built-in just for tile ceilings



Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFQ3001236	TC-L	220	595	377	595	268	50	2 PCS





3\*36

Steel  
Surface & built-in just for tile ceilings



Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFQ3001336	TC-L	220	595	377	595	268	50	2 PCS





4\*36

Steel  
Surface & built-in just for tile ceilings



Technical code	LAMP	Input Voltage	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TFQ3001436	TC-L	220	595	377	595	268	50	2 PCS







7W

Steel

Surface & built-in light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLQ36CO007WW	LED SMD	3000k	>80	220	630	300	295	300	295	80	2 PCS
TLQ36CO007C4	LED SMD	4000k	>80	220	630	300	295	300	295	80	2 PCS
TLQ36CO007W6	LED SMD	6500k	>80	220	630	300	295	300	295	80	2 PCS




35W

Steel

Surface & built-in light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLQ36CO035WW	LED SMD	3000k	>80	220	3150	595	480	595	480	80	2 PCS
TLQ36CO035C4	LED SMD	4000k	>80	220	3150	595	480	595	480	80	2 PCS
TLQ36CO035W6	LED SMD	6500k	>80	220	3150	595	480	595	480	80	2 PCS





49W

Steel

Surface & built-in light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLQ36CO049WW	LED SMD	3000k	>80	220	4400	595	480	595	480	80	2 PCS
TLQ36CO049C4	LED SMD	4000k	>80	220	4400	595	480	595	480	80	2 PCS
TLQ36CO049W6	LED SMD	6500k	>80	220	4400	595	480	595	480	80	2 PCS





56W

Steel

Surface & built-in light



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLQ36CO056WW	LED SMD	3000k	>80	220	5000	595	480	595	480	80	2 PCS
TLQ36CO056C4	LED SMD	4000k	>80	220	5000	595	480	595	480	80	2 PCS
TLQ36CO056W6	LED SMD	6500k	>80	220	5000	595	480	595	480	80	2 PCS





63W

Steel

Surface & built-in light





Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLQ36CO063WW	LED SMD	3000k	>80	220	5600	595	480	595	480	80	2 PCS
TLQ36CO063C4	LED SMD	4000k	>80	220	5600	595	480	595	480	80	2 PCS
TLQ36CO063W6	LED SMD	6500k	>80	220	5600	595	480	595	480	80	2 PCS



### Professional lighting

Basic lighting is the need of every store that places the highest value on its customers and products.

Arsin rail lights with a strong body and aluminum reflector are a lasting and quality light in any store.

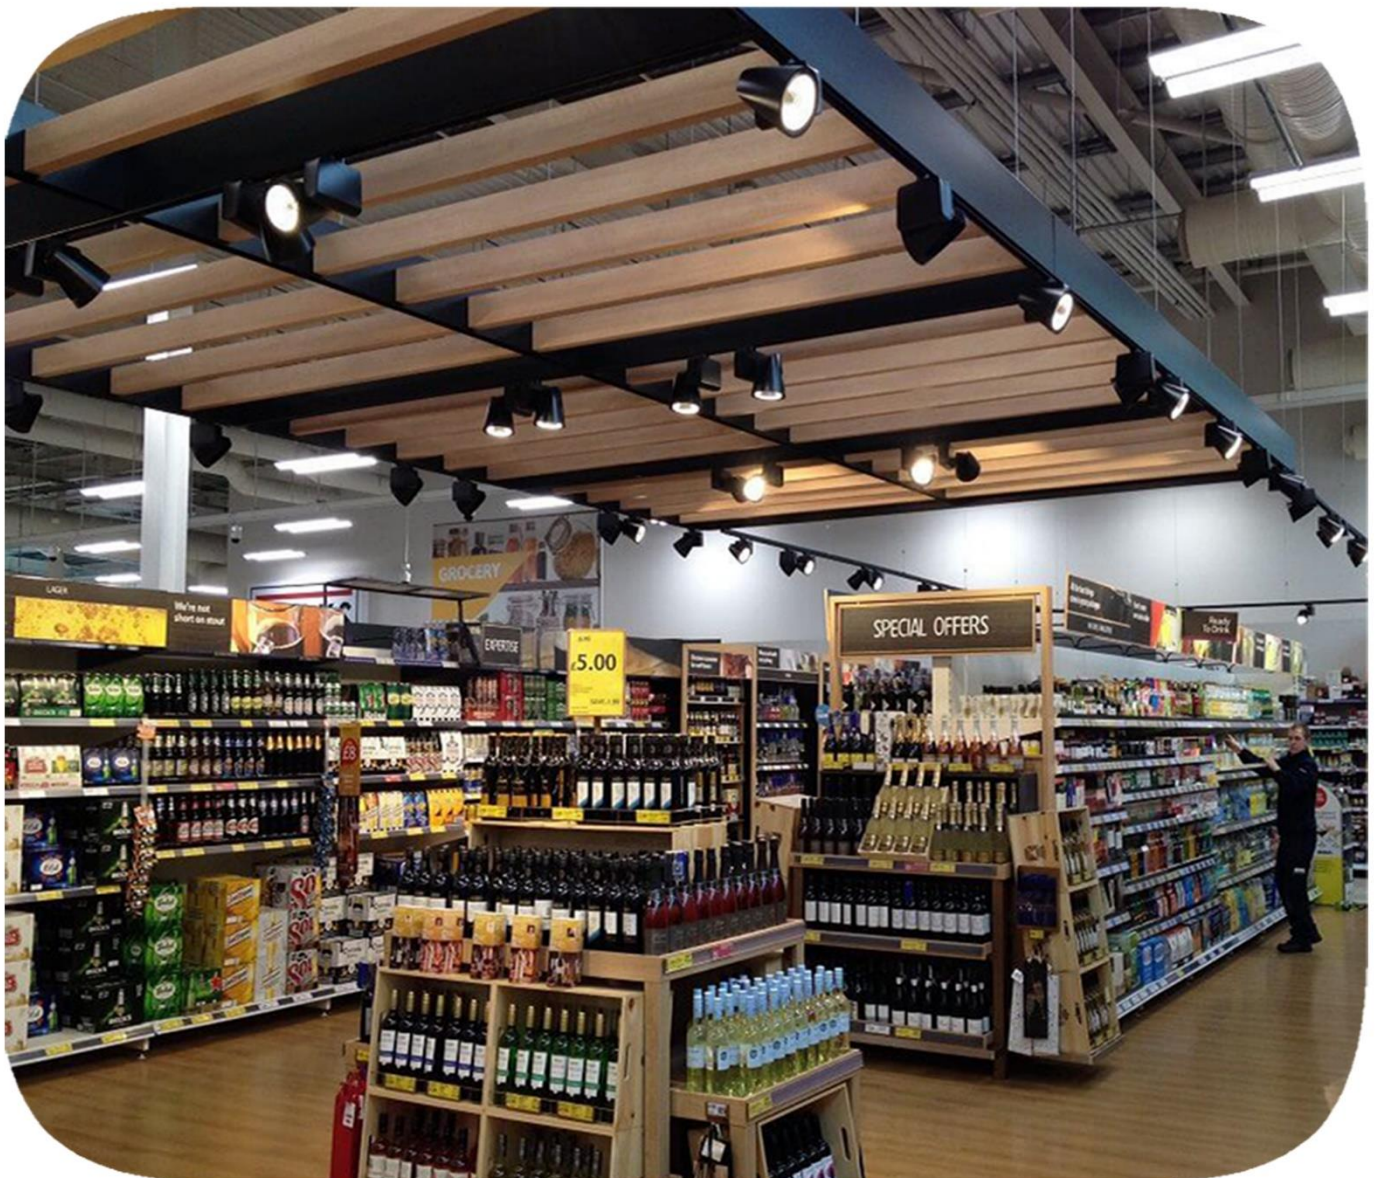




30W

Diecast Aluminum

Rail lights



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	H mm	QTT
TLS42CO030WW	LED COB	3000k	>80	220	2500	110	160	210	6 PCS
TLS42CO030C4	LED COB	4000k	>80	220	2500	110	160	210	6 PCS
TLS42CO030W6	LED COB	6500k	>80	220	2500	110	160	210	6 PCS




40W

Diecast Aluminum

Rail lights



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	H mm	QTT
TLS42CO040WW	LED COB	3000k	>80	220	3350	110	160	210	6 PCS
TLS42CO040C4	LED COB	4000k	>80	220	3350	110	160	210	6 PCS
TLS42CO040W6	LED COB	6500k	>80	220	3350	110	160	210	6 PCS




40W

Diecast Aluminum

Rail lights



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	H mm	QTT
TLS42CO040WW*	LED COB	3000k	>80	220	3540	110	160	210	6 PCS
TLS42CO040C4*	LED COB	4000k	>80	220	3540	110	160	210	6 PCS
TLS42CO040W6*	LED COB	6500k	>80	220	3540	110	160	210	6 PCS





One line track rail  
1 meter

**Technical code**  
TLS42100



One line track rail  
2 meters

**Technical code**  
TLS42200



I shape Rotating  
adaptor

**Technical code**  
TLS42



L shape Rotating  
adaptor

**Technical code**  
TLS42L



I shape inner  
adaptor

**Technical code**  
TLS42I



I shape outer  
adaptor

**Technical code**  
TLS42IO



T shape adaptor

**Technical code**  
TLS42T



Plus shape adaptor

**Technical code**  
TLS42+



---

Rail power



**Technical code**  
TLS42POWER



Beginning and end  
cap

**Technical code**  
TLS42ENDCAP



---



Lifting accessories



**Technical code**  
TLS42PLUG

**The end of the maintenance concern!**

Adrina is a good option for spaces that are exposed to pollution, splashing water or other damaging things.

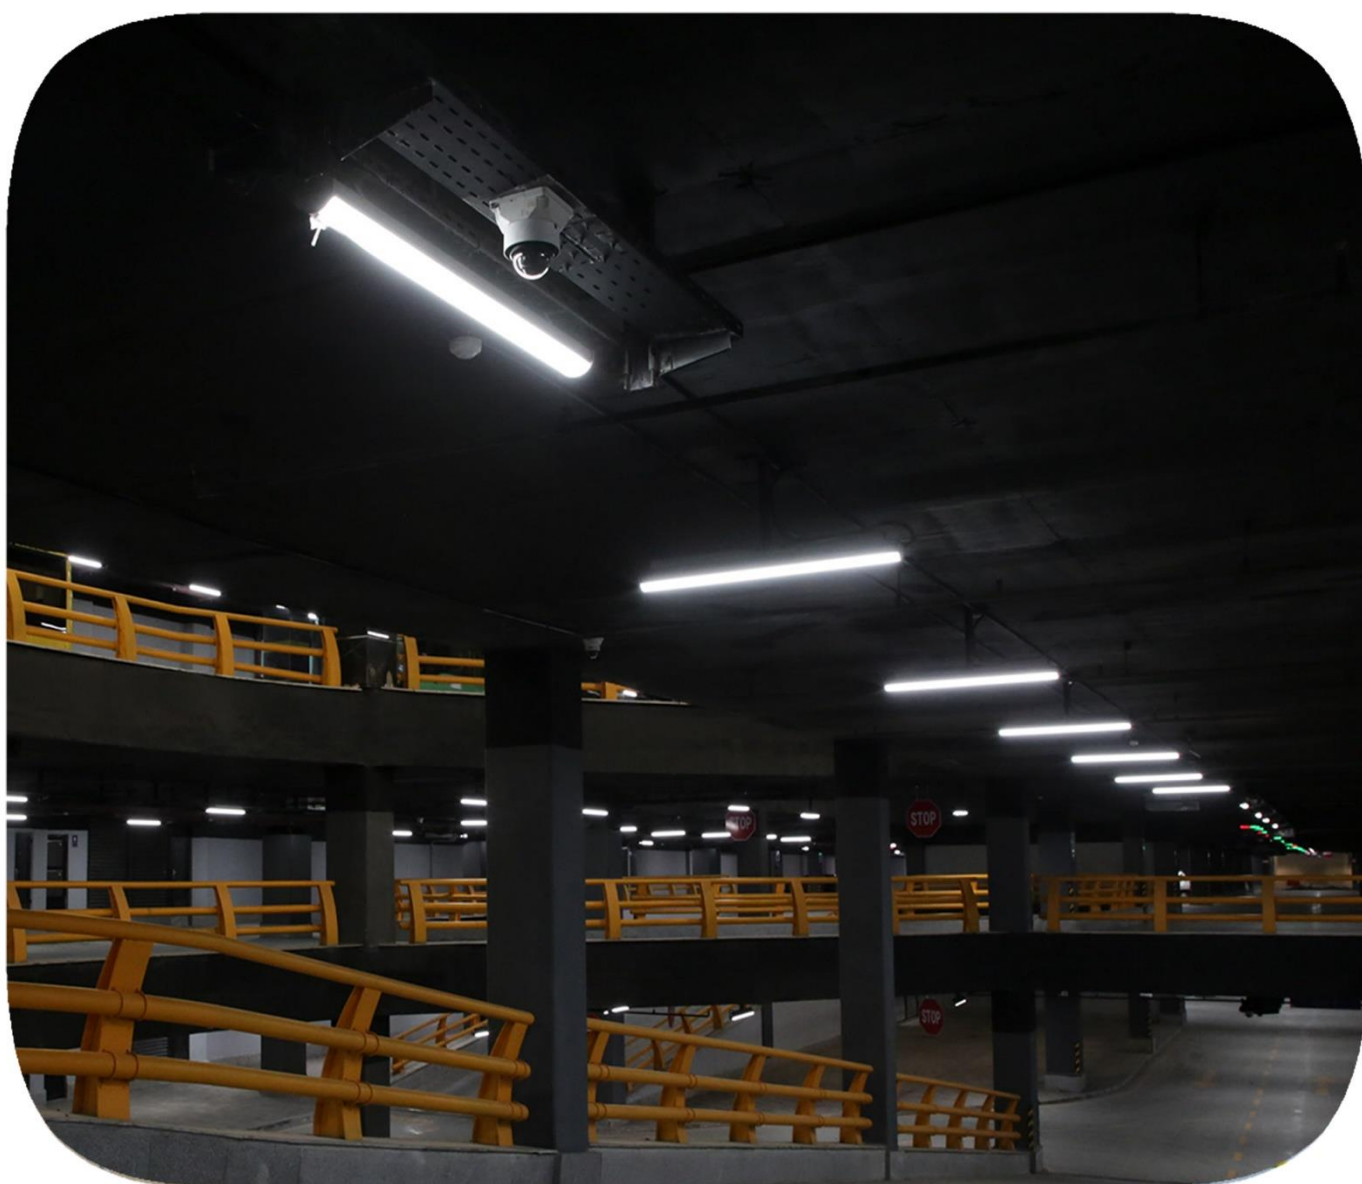


8W

Extruded Aluminum  
Resistant to moisture & dust lights



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS6706008WW	LED SMD	3000k	>80	220	850	260	96	ADJ	70	2 PCS
TLS6706008C4	LED SMD	4000k	>80	220	850	260	96	ADJ	70	2 PCS
TLS6706008W6	LED SMD	6500k	>80	220	850	260	96	ADJ	70	2 PCS

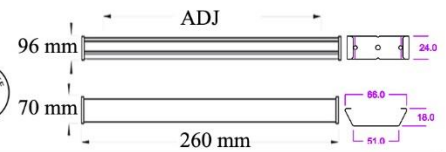


13W

Extruded Aluminum  
Resistant to moisture & dust lights



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS6706013WW	LED SMD	3000k	>80	220	1400	360	96	ADJ	70	2 PCS
TLS6706013C4	LED SMD	4000k	>80	220	1400	360	96	ADJ	70	2 PCS
TLS6706013W6	LED SMD	6500k	>80	220	1400	360	96	ADJ	70	2 PCS

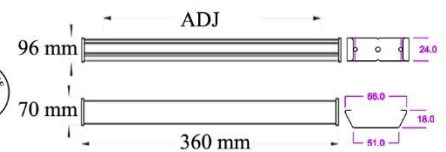


20W

Extruded Aluminum  
Resistant to moisture & dust lights



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS6706020WW	LED SMD	3000k	>80	220	2240	580	96	ADJ	70	2 PCS
TLS6706020C4	LED SMD	4000k	>80	220	2240	580	96	ADJ	70	2 PCS
TLS6706020W6	LED SMD	6500k	>80	220	2240	580	96	ADJ	70	2 PCS

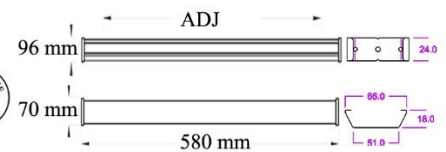


40W

Extruded Aluminum  
Resistant to moisture & dust lights



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS6706040WW	LED SMD	3000k	>80	220	4480	1160	96	ADJ	70	2 PCS
TLS6706040C4	LED SMD	4000k	>80	220	4480	1160	96	ADJ	70	2 PCS
TLS6706040W6	LED SMD	6500k	>80	220	4480	1160	96	ADJ	70	2 PCS

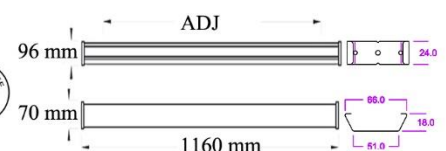




60W

Extruded Aluminum  
Resistant to moisture & dust lights



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS6706060WW	LED SMD	3000k	>80	220	6720	1740	96	ADJ	70	2 PCS
TLS6706060C4	LED SMD	4000k	>80	220	6720	1740	96	ADJ	70	2 PCS
TLS6706060W6	LED SMD	6500k	>80	220	6720	1740	96	ADJ	70	2 PCS

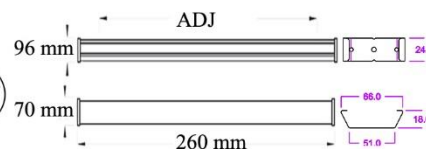


80W

Extruded Aluminum  
Resistant to moisture & dust lights





Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	E mm	H mm	QTT
TLS6706080WW	LED SMD	3000k	>80	220	8960	2300	96	ADJ	70	2 PCS
TLS6706080C4	LED SMD	4000k	>80	220	8960	2300	96	ADJ	70	2 PCS
TLS6706080W6	LED SMD	6500k	>80	220	8960	2300	96	ADJ	70	2 PCS

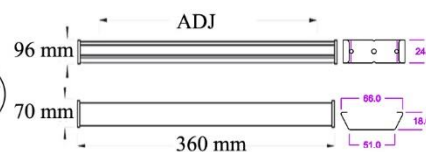

Feel the power of light!

Azera projectors are the best choice for spaces that require a complete, quality and long-lasting light.

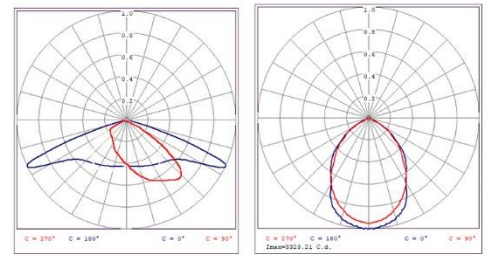

60W Diecast Aluminum  
nano waterproof covering on the luminous surface



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS96LS060WW	LED SMD	3000k	>80	220	7800	SL12-90	276	206	53	6 PCS
TUS96LS060C4	LED SMD	4000k	>80	220	7800	SL12-90	276	206	53	6 PCS
TUS96LS060W6	LED SMD	6500k	>80	220	7800	SL12-90	276	206	53	6 PCS



110W Diecast Aluminum  
nano waterproof covering on the luminous surface



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS96LS110WW	LED SMD	3000k	>80	220	12650	SL12-90	396	272	82	1 PCS
TUS96LS110C4	LED SMD	4000k	>80	220	12650	SL12-90	396	272	82	1 PCS
TUS96LS110W6	LED SMD	6500k	>80	220	12650	SL12-90	396	272	82	1 PCS



180W Diecast Aluminum  
nano waterproof covering on the luminous surface



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS96LS180WW	LED SMD	3000k	>80	220	25000	SL12-90	456	357	85	1 PCS
TUS96LS180C4	LED SMD	4000k	>80	220	25000	SL12-90	456	357	85	1 PCS
TUS96LS180W6	LED SMD	6500k	>80	220	25000	SL12-90	456	357	85	1 PCS



220W Diecast Aluminum  
nano waterproof covering on the luminous surface



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS96LS220WW	LED SMD	3000k	>80	220	35000	SL12-90	456	357	85	1 PCS
TUS96LS220C4	LED SMD	4000k	>80	220	35000	SL12-90	456	357	85	1 PCS
TUS96LS220W6	LED SMD	6500k	>80	220	35000	SL12-90	456	357	85	1 PCS





60W Diecast Aluminum  
nano waterproof covering on the luminous surface



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS28LL060WW	LED SMD	3000k	>80	220	7800	SL12T2M-45	276	206	53	6 PCS
TUS28LL060C4	LED SMD	4000k	>80	220	7800	SL12T2M-45	276	206	53	6 PCS
TUS28LL060W6	LED SMD	6500k	>80	220	7800	SL12T2M-45	276	206	53	6 PCS



110W Diecast Aluminum  
nano waterproof covering on the luminous surface



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS96LL110WW	LED SMD	3000k	>80	220	12650	SL12T2M-45	396	272	82	1 PCS
TUS96LL110C4	LED SMD	4000k	>80	220	12650	SL12T2M-45	396	272	82	1 PCS
TUS96LL110W6	LED SMD	6500k	>80	220	12650	SL12T2M-45	396	272	82	1 PCS



180W Diecast Aluminum  
nano waterproof covering on the luminous surface



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS96LL180WW	LED SMD	3000k	>80	220	25000	SL12T2M-45	456	357	85	1 PCS
TUS96LL180C4	LED SMD	4000k	>80	220	25000	SL12T2M-45	456	357	85	1 PCS
TUS96LL180W6	LED SMD	6500k	>80	220	25000	SL12T2M-45	456	357	85	1 PCS



220W Diecast Aluminum  
nano waterproof covering on the luminous surface



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS96LL220WW	LED SMD	3000k	>80	220	35000	SL12T2M-45	456	357	85	1 PCS
TUS96LL220C4	LED SMD	4000k	>80	220	35000	SL12T2M-45	456	357	85	1 PCS
TUS96LL220W6	LED SMD	6500k	>80	220	35000	SL12T2M-45	456	357	85	1 PCS






4W

Extruded Aluminum  
Facade of the building - high<10 meters



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS61A8004AM	LED SMD	2000k	>80	220	400	6*80	140	62	100	24 PCS
TUS61A8004WW	LED SMD	3000k	>80	220	400	6*80	140	62	100	24 PCS
TUS61A8004C4	LED SMD	4000k	>80	220	400	6*80	140	62	100	24 PCS
TUS61A8004W6	LED SMD	6500k	>80	220	400	6*80	140	62	100	24 PCS

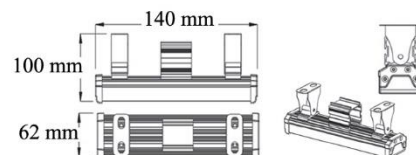


6W

Extruded Aluminum  
Facade of the building - high<10 meters



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS61B8006AM	LED SMD	2000k	>80	220	635	6*80	180	62	100	20 PCS
TUS61B8006WW	LED SMD	3000k	>80	220	635	6*80	180	62	100	20 PCS
TUS61B8006C4	LED SMD	4000k	>80	220	635	6*80	180	62	100	20 PCS
TUS61B8006W6	LED SMD	6500k	>80	220	635	6*80	180	62	100	20 PCS

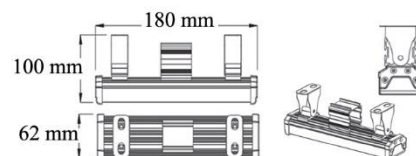


9W

Extruded Aluminum  
Facade of the building - high<10 meters



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS61B8009AM	LED SMD	2000k	>80	220	963	6*80	274	62	100	12 PCS
TUS61B8009WW	LED SMD	3000k	>80	220	963	6*80	274	62	100	12 PCS
TUS61B8009C4	LED SMD	4000k	>80	220	963	6*80	274	62	100	12 PCS
TUS61B8009W6	LED SMD	6500k	>80	220	963	6*80	274	62	100	12 PCS

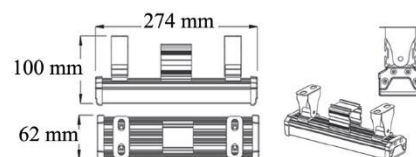


18W

Extruded Aluminum  
Facade of the building - high<10 meters



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS61C8018AM	LED SMD	2000k	>80	220	1980	6*80	504	62	100	2 PCS
TUS61C8018WW	LED SMD	3000k	>80	220	1980	6*80	504	62	100	2 PCS
TUS61C8018C4	LED SMD	4000k	>80	220	1980	6*80	504	62	100	2 PCS
TUS61C8018W6	LED SMD	6500k	>80	220	1980	6*80	504	62	100	2 PCS

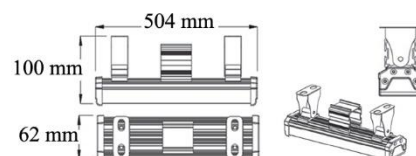


36W

Extruded Aluminum  
Facade of the building - high < 10 meters



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS61D8036AM	LED SMD	2000k	>80	220	3920	6*80	1000	62	100	2 PCS
TUS61D8036WW	LED SMD	3000k	>80	220	3920	6*80	1000	62	100	2 PCS
TUS61D8036C4	LED SMD	4000k	>80	220	3920	6*80	1000	62	100	2 PCS
TUS61D8036W6	LED SMD	6500k	>80	220	3920	6*80	1000	62	100	2 PCS

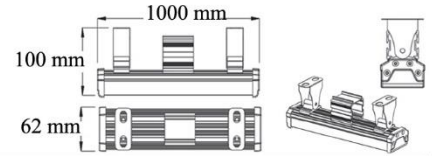




4W

Extruded Aluminum  
Facade of the building - high > 10 meters



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS69A8004AM	LED SMD	2000k	>80	220	400	6*6	140	62	100	24 PCS
TUS61A8004WW	LED SMD	3000k	>80	220	400	6*6	140	62	100	24 PCS
TUS61A8004C4	LED SMD	4000k	>80	220	400	6*6	140	62	100	24 PCS
TUS61A8004W6	LED SMD	6500k	>80	220	400	6*6	140	62	100	24 PCS

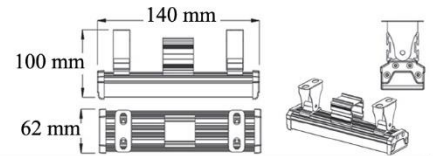


6W

Extruded Aluminum  
Facade of the building - high > 10 meters



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS69B8006AM	LED SMD	2000k	>80	220	635	6*6	180	62	100	20 PCS
TUS69B8006WW	LED SMD	3000k	>80	220	635	6*6	180	62	100	20 PCS
TUS69B8006C4	LED SMD	4000k	>80	220	635	6*6	180	62	100	20 PCS
TUS69B8006W6	LED SMD	6500k	>80	220	635	6*6	180	62	100	20 PCS

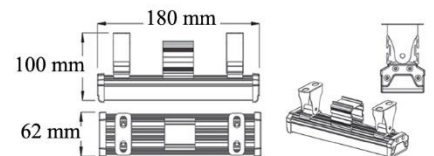


9W

Extruded Aluminum  
Facade of the building - high > 10 meters



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS69B8009AM	LED SMD	2000k	>80	220	963	6*6	274	62	100	12 PCS
TUS69B8009WW	LED SMD	3000k	>80	220	963	6*6	274	62	100	12 PCS
TUS69B8009C4	LED SMD	4000k	>80	220	963	6*6	274	62	100	12 PCS
TUS69B8009W6	LED SMD	6500k	>80	220	963	6*6	274	62	100	12 PCS

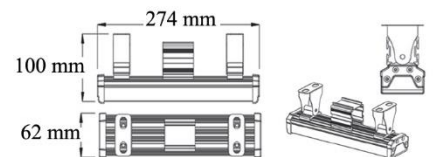


18W

Extruded Aluminum  
Facade of the building - high > 10 meters



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS69C8018AM	LED SMD	2000k	>80	220	1980	6*6	504	62	100	2 PCS
TUS69C8018WW	LED SMD	3000k	>80	220	1980	6*6	504	62	100	2 PCS
TUS69C8018C4	LED SMD	4000k	>80	220	1980	6*6	504	62	100	2 PCS
TUS69C8018W6	LED SMD	6500k	>80	220	1980	6*6	504	62	100	2 PCS

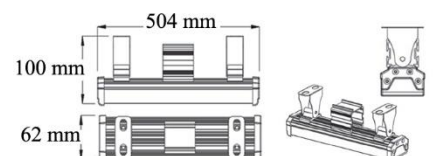


36W

Extruded Aluminum  
Facade of the building - high > 10 meters



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	Lenz	L mm	W mm	H mm	QTT
TUS69D8036AM	LED SMD	2000k	>80	220	3920	6*6	1000	62	100	2 PCS
TUS69D8036WW	LED SMD	3000k	>80	220	3920	6*6	1000	62	100	2 PCS
TUS69D8036C4	LED SMD	4000k	>80	220	3920	6*6	1000	62	100	2 PCS
TUS69D8036W6	LED SMD	6500k	>80	220	3920	6*6	1000	62	100	2 PCS

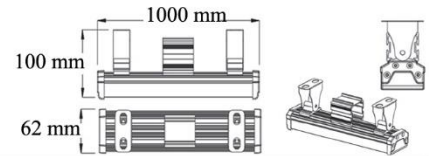



3W


Diecast Aluminum  
To Beautify the outdoor and indoor living spaces




Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	H mm	QTT
TUS18CO003WW	LED COB	3000k	>80	220	350	95	92	98	18 PCS
TUS18CO003C4	LED COB	4000k	>80	220	350	95	92	98	18 PCS
TUS18CO003W6	LED COB	6500k	>80	220	350	95	92	98	18 PCS



95 mm



98 mm




8W

Diecast Aluminum / Steel  
To Beautify the outdoor and indoor living spaces



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	H mm	QTT
TLS23D3008WW	LED SMD	3000k	>80	220	500	250	60	60	10 PCS
TLS23D3008C4	LED SMD	4000k	>80	220	500	250	60	60	10 PCS
TLS23D3008W6	LED SMD	6500k	>80	220	500	250	60	60	10 PCS



3W

Extruded Aluminum


Surface and hanging lights/during electricity is disconnected



Technical code	Light Source	CCT	L mm	W mm	H mm	charge maintenance	QTT
TLS9507003W6	LED SMD	6500k	365	230	45	≥180 Min	1 PCS




230 mm





### Creating a gentle atmosphere!

Arian lights are an attractive choice for lighting soft spaces, such as the garden of villas, residential areas, restaurants, etc.






10W

Extruded Aluminum  
Green space lights /For soft place lighting



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	H mm	QTT
TUS1102010WW	LED SMD	3000k	>80	220	800	226	120	850	2 PCS
TUS1102010C4	LED SMD	3000k	>80	220	800	226	120	850	2 PCS
TUS1102010W6	LED SMD	3000k	>80	220	800	226	120	850	2 PCS




10W

Steel  
Wall lights /For soft place lighting




Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	W mm	H mm	QTT
TUS1202010WW	LED SMD	4000k	>80	220	800	226	120	260	12 PCS
TUS1202010C4	LED SMD	4000k	>80	220	800	226	120	260	12 PCS
TUS1202010W6	LED SMD	4000k	>80	220	800	226	120	260	12 PCS



### Treatment tool


Negatoscope in compliance with international standards, it is designed to be used in hospitals, medical centers, surgery rooms, etc.



84W Steel  
Surface, built-in or wall light/To view radiological images




Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLS72BN084W6	LED SMD	6500k	>80	220	8200	570	536	430	395	46	2 PCS



117W Steel  
Surface, built-in or wall light/To view radiological images



Technical code	Light Source	CCT	CRI	Input Voltage	Lm	L mm	L1 mm	W mm	W1 mm	H mm	QTT
TLS72BN117W6	LED SMD	6500k	>80	220	16000	810	775	570	531	46	2 PCS



Let's choose wisely